

EXTERIOR

- Encimera acero inox AISI 304 18/10
- Acero Inox AISI 430

INTERIOR

- Acero Inox AISI 430
- Parrillas de alambre de acero plastificado, regulables en altura y fácilmente desmontables
- Marco de puerta calefactado para evitar la acumulación de hielo (F)

AISLAMIENTO

- Poliuretano inyectado alta presión libre de CFC's densidad 40 kg/m³, bajo GWP y cero efecto ODP

PUERTAS

- Contrapuerta embutida
- Burlete de triple cámara fácilmente sustituible
- Puertas con tirador integrado
- Bisagra pivotante con bloqueo de apertura

RUEDAS

- Diámetro 100 mm. Delanteras con freno

REFRIGERACIÓN

- Sistema de ventilación frontal
- Evaporadores tratados anticorrosión 100% Poliéster
- Bandeja evaporativa
- Desescarche por gas caliente (F)

EXTERIOR

- AISI 304 18/10 stainless steel worktop
- AISI 430 stainless steel

INTERIOR

- AISI 430 stainless steel
- Plastic coated wire shelves, adjustable height and easy removal
- Heated door frame to prevent the accumulation of ice (F)

INSULATION

- Free CFC's high density (40kg/m³) polyurethane insulation with low GWP & zero ODP effect

DOORS

- Stamped rear door
- Easy removal triple chamber gasket
- Integrated handle doors
- Self closing doors with stay open feature

CASTERS

- 100 mm diameter. Front brake casters

REFRIGERATION

- Front breathing refrigeration system
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Evaporative tray
- Hot gas defrost (F)

OPCIONAL / OPTIONAL

- Parrilla / Wire shelf UC27 (502X73)
- Parrilla / Wire shelf UC48 (502X74)
- Parrilla / Wire shelf UC60 (502X75)
- Cerradura / Lock (506X120; 506X121)
- Patas / Legs (506X42)

L. americana



MODELOS MODELS	→	↗	↑	⏻	⚠	📦	📱	📊	🔧	❄	🛒	💧	🌡	🔧	🔧	🌡
	Dimensiones Dimensions LxPxH (mm)	Potencia Power (W)	Eléctrica Electrical (V/Hz)	Capacidad Capacity (L)	Nº puertas Doors	Nº parrillas J. guías No shelves/ Slides	Compresor Compressor (HP)	Potencia frigorífica Cooling capacity (W a -10°C)	Consumo Consumption (kWh/24h)	Evaporación Evaporation	Régimen T ^{RA} Temperature range (38°C)	Desescarche Defrost	Control Control	Refrigerante Refrigerant		
UC 27 R	702x766x910	381	230 / 50	200	1	2/2 (570x437)	1/5	254	1,74	Forzada Forced	-2°C / +8°C	Automático Automatic	Termostático Thermostatic	R134a		

Características técnicas y constructivas sujetas a variación sin previo aviso / We reserve the right to change specifications without prior notice

MESA UNDERCOUNTER REFRIGERACIÓN Y CONGELACIÓN SERIE UC
UNDERCOUNTER REFRIGERATOR AND FREEZER UC SERIES



UC 27 R

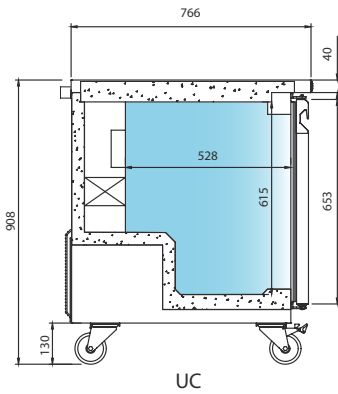

UC 27 R



L. americana



Av. La Paz 913, Col. Centro, Guadalajara, Jal. C.P. 44100
Tel.(33)33450650 ventas@servinox.com.mx
www.servinox.com.mx

